

BULLHEAD .5K

Operation Manual



Congratulations on your purchase of the Trickfish Bullhead .5K. The Bullhead .5K bass amplifier sets a new performance standard in affordable bass amplification. Featuring the acclaimed Mike Pope designed low noise pre-amp integrated with a tour proven, 700W Class D power amplifier, the BH.5K offers all of the professional features and performance expected of a Trickfish product. Housed in a robust aluminum chassis, the powerful head offers a wide variety of tone-shaping capabilities via a 4-band EQ and 8 frequency select options. Other features include selectable input sensitivity, aux input, Pre/Post Balanced DI Output, EFX: Parallel loop, amp mute and a Neutrik Speakon combi-connector. Weighing in at a paltry 5lbs the BH.5K also sports classic “chicken head knobs” for easy, fast adjustments and the rack-mountable chassis is powder coated in a durable, Deep Sea Blue matte finish.

This manual contains valuable safety instructions, operational information, and some insights we’ve gained over the years. Please take a few minutes to read it.

Trickfish Amplification is dedicated to delivering a collection of killer products that will serve as valuable tools for discriminating bassists as they seek inspiration for their artistic vision. We share a common vision of intelligent design, precision, delectable tone and rugged durability in everything we build, and we’re committed to providing impeccable customer service; service that’s commensurate with the quality we strive to deliver in every design we offer.

Trickfish products are designed and manufactured for discerning musicians looking for accuracy, power and reliability while in pursuit of their artistic vision. We strive to deliver intelligently designed product that is easy to operate, is beautiful to look at and yet without compromise, reveals the nuance and subtlety of the player and their instrument. We have a passion for what we do, and that love is channeled through strong principles and ideals. We demand the best out of ourselves because without that resolve, the product would be only average – we are not striving to be average.

Unpacking the amplifier

IMPORTANT NOTE: Your Trickfish Amplification product was originally packaged in a specially designed carton and included special packing materials. Please save these items. They should be used when shipping your Trickfish Amplification product.

Please inspect the shipping carton. If the packaging is damaged immediately return this item to the shipper.

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE.

CAUTION:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK DO NOT REMOVE THE COVER. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING BACK TO MANUFACTURER



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) in the literature accompanying this device.

Important Safety Instructions

- Read these instructions.
- Keep these instructions
- Heed all warnings.
- Follow the instructions.
- Do not use this apparatus near water.
- Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- Do not defeat the safety purpose of the grounding type plug. A grounding type plug has two blades and a third grounding prong and is used for your safety.
- Protect the power cable from being walked on or pinched particularly at the plugs or at the point where they exit the device.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Object and Liquid entry: Never push any foreign objects of any kind into the openings as they may touch dangerous voltage points that could result in fire or electric shock. The apparatus shall not be exposed to dripping or splashing and no objects filled with liquids such as a beverage shall be placed on top.
- When the apparatus exhibits a distinct change in performance this indicates a need for service.
- There are NO USER SERVICABLE PARTS
- Refer servicing to all qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as the power cable has been damaged or liquid has been spilled or objects have fallen into the apparatus or the apparatus has been exposed to rain or moisture, does not operate normally or has been dropped.
- Damage requiring service: Unplug the apparatus from the wall outlet and refer servicing to qualified service personnel under the following conditions:
 - a) When the power supply cord has been damaged.
 - b) If liquid has been spilled, or objects have fallen into the apparatus.
 - c) If the apparatus has been exposed to rain or moisture.
 - d) If the apparatus does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the apparatus to its normal operation.
 - e) If the apparatus has been dropped or damaged.
- Connecting: When you connect the amplifier unit to other equipment, turn off the power and unplug all of the equipment from the supply source. Failure to do so may cause an electric shock and serious personal injury. Read the user manual of the other equipment carefully and follow the instructions when making the connections.
- Sound Volume: Reduce the volume to minimum before you turn on the amplifier to prevent sudden high levels of noise which may cause hearing or speaker damage.
- Speakon connectors: WARNING: Speakon connectors marked with the lightning flashes indicate high voltages that are potentially life threatening. Wiring to these terminals requires installation by an instructed person and the use of ready made leads or cords.
- Custom wiring should only be carried out by qualified personnel.
- To prevent electric shock, do not operate the product with any of the conductor portion of the speaker wire exposed.
- NOTE: For reasons of safety and performance, use only high quality fully insulated speaker cables of stranded copper wire. Use the largest wire size that is economically and physically practical, and make sure the cables are no longer than necessary.

EC Declaration of Conformity in accordance to EC Directives

Electro-magnetic compatibility (Council Directive 89/336/EEC, as amended by Directives 92/31/EEC and 93/68/EEC); Low - voltage electrical equipment (Council Directive 73/23/EEC)

This product conforms to the following standards:

EN55103 - 1 Emission

EN55103 - 2 Immunity



FCC Part 15 Class B Compliance

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

This equipment has been verified to comply with the limits for a class B computing device, pursuant to FCC Rules. In order to maintain compliance with FCC regulations, shielded cables must be used with this equipment. Operation with non-approved equipment or unshielded cables is likely to result in interference to radio and TV reception. The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment.

Connections:

1. Remove the AC cable from the package and firmly insert the female end in the AC receptacle located on the back panel of your amp.
2. With the amplifier in the "OFF POSITION" plug the male end of the AC cable into the wall outlet.
3. Connect the speaker using Neutrik Combo Connector on the rear panel - Make sure that you are using an "unshielded" speaker cable and that the polarity of the cable is correct. Do not use a shielded instrument cable to connect speakers to an amplifier. Ensure that the cable is good quality and that there are no nicks or abrasions of the insulation that could expose people or equipment to the electrical potential that is present on the speaker conductors. Never allow speaker connections to short or contact other metal objects. Do not connect output to anything other than a proper speaker load. Do not use a shielded instrument cable to connect speakers to an amplifier.
4. Now you can connect your instrument to the amplifier. Make certain that you are using a "shielded" instrument cable to connect your instrument to your amplifier. If you are unsure of the type of cables you currently own, we advise you take a trip to your local music store and purchase the appropriate cables.
5. If you have a passive instrument plug it into the instrument input and select the "HI" setting on the attenuator switch. If you have an active instrument then flip the attenuator switch to the "LO" gain setting.

Powering Up:


1. Turn the volume on your instrument to the loudest position.
2. Place the amp in the "mute" position.
3. Next, set the EQ controls (bass, mid, and treble) to zero (twelve o'clock position) and begin playing aggressively while turning up the Gain control of the appropriate channel (as indicated by the LED indicators). When the top LED stays in the red your input is probably too hot and your signal will distort. A little bit of the red LED on the peaks is OK.
4. Next, disengage the "mute" switch and slowly turn the Master Control clockwise to the desired listening volume. At this point you should be hearing your instrument amplified through the system.
5. As you ADD EQ you are also adding gain and so, once you've turned up the Master and start to EQ, be aware that the signal will INCREASE as EQ is added. You may have to re-adjust the "Input Gain" once you've added EQ.

Bullhead .5K Back Panel Features



1. **Instrument Input:** 1/4" phone plug line input
2. **Input Attenuator:** 0,+9db of gain to accommodate active or passive inputs
3. **Input Level Indicator:** 2 segment LED ladder indicates amount of gain after EQ, FX circuit
4. **Input Gain:** Input level adjust
5. **Bass EQ Cut/Boost:** Center detent is flat. Counter clockwise cuts, clockwise rotation boosts
6. **Bass EQ Frequency Select:** Selects frequency for the shelving bass EQ
7. **Low Mid Cut/Boost:** Center detent is flat. Counter clockwise cuts, clockwise rotation boosts
8. **Low Mid Frequency Select:** Selects the frequency for the Low - Mid Bandpass EQ
9. **Hi Mid Cut/Boost:** Center detent is flat. Counter clockwise cuts, clockwise rotation boosts
10. **Hi Mid Frequency Select:** Selects the frequency for the Hi - Mid Bandpass EQ
11. **Treble EQ Cut/Boost:** Center detent is flat. Counter clockwise cuts, clockwise boosts
12. **Treble EQ Frequency Select:** Selects the frequency for the shelving Treble EQ
13. **Master Volume:** Controls the overall volume of the amplifier
14. **Amplifier Mute:** Mutes the signal to the amplifier and to the DI
15. **Headphone Output:** 1/4" stereo phone plug for headphone monitoring
16. **Line Input:** 1/8" mini plug accommodates MP3 players and any other input sources
17. **AC Mains on/off:** Power on/off
18. **Power on/off LED indicator:** Illuminated blue LED indicates power is on no light means power is off

Bullhead .5K Back Panel Features

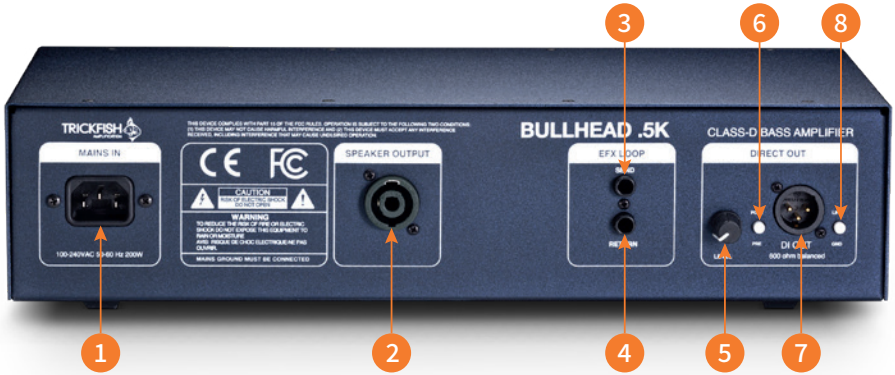

- 1. AC Mains Input:** Attach supplied cable firmly into socket
- 2. Speaker Output:** Neutrik Combo connector accommodates both Speakon and 1/4" phone plugs
- 3. EFX Loop Send:** 1/4" phone jack routes the signal TO the destination device
- 4. EFX Loop Return:** 1/4" phone jack returns the signal FROM the destination device
- 5. Direct Out Level Control:** Rotary knob controls the level of output to the intended destination
- 6. Direct Out Pre/Post select switch:** Switches between a Pre - EQ/FX or Post - EQ/FX send
- 7. Direct Out XLR:** Balanced Female XLR connection
- 8. Direct Out Ground Lift Switch:** Ground lift dedicated to Direct Out

Bullhead .5K Specs

Power Output:

4 Ohms: 702W @ 1% THD

8 Ohms: 365W @1% THD

Power Amplifier: Class D with Switch - Mode Power Supply

Pre-Amp: Low noise, all analog, solid state

Input: ¼" Phone with switchable attenuation and rotary gain control

Input Level Indicator: Signal level and Clip LEDs (green/red)

EQ: 4 Band

Shelving Bass and Treble with selectable Hi-Pass frequencies

Low-Mid and Hi-Mid - Variable Gain, Band Pass EQ with selectable frequency / bandwidth options

Master Volume: Rotary Control

Line In: 1/8" mini jack

Headphone Out: Stereo 1/4" jack

Mute Switch: mini toggle

AC Mains: 85 - 132V, 195 - 264V, 45 - 65 Hz, 1000VA (Worldwide usage)

AC Mains Indicator: Blue LED

EFX Loop: Parallel

Direct Out: 600 Ohm Balanced, XLR, Pre/Post, Ground Lift and Level control

Speaker Output: 1 x Neutrik Combo connectors

Chassis: Aircraft grade aluminum w/removable rubber feet

Size: (H x W x D in.) 3.39 x 15.1 x 8

Weight: 5.2 lbs.

Warranty:

We proudly stand behind our products with a 5 year warranty against manufacturer defects with one exception; drivers are warrantied against manufacturer defect for 90 days. This warranty extends to the original owner of the product and the product must have been purchased from an authorized Trickfish Amplification dealer. The owner must present to us the sales invoice that clearly shows the dealer's name, store location or website, product model and date of purchase. We do not warranty against abuse, water damage, fire, physical force, modification, improper installation, power surges or brownouts, or any other damage caused by a third party. Please contact **service@trickfishamps.com** to obtain a Return Authorization number for the repair. Depending on the nature of the repair we may have the unit sent to us or have the owner take it to a local repair facility. The owner will be responsible for freight charges to the repair facility and if it is deemed, at our discretion, that the repairs needed fall under the guidelines of the warranty, we will pay the return freight.

TRICKFISH

AMPLIFICATION



Cypress, TX, 77433

www.trickfishamps.com
sales@trickfishamps.com